
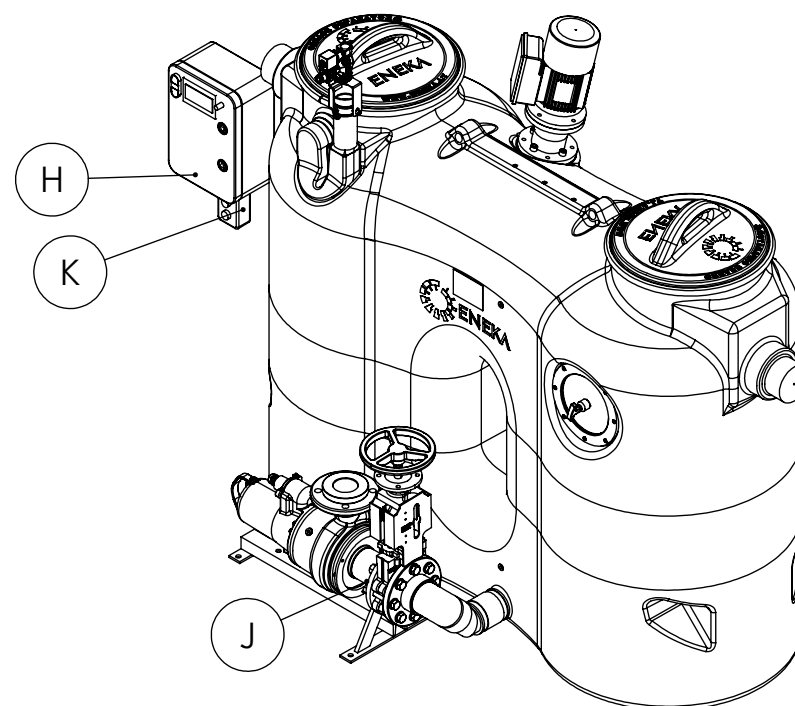
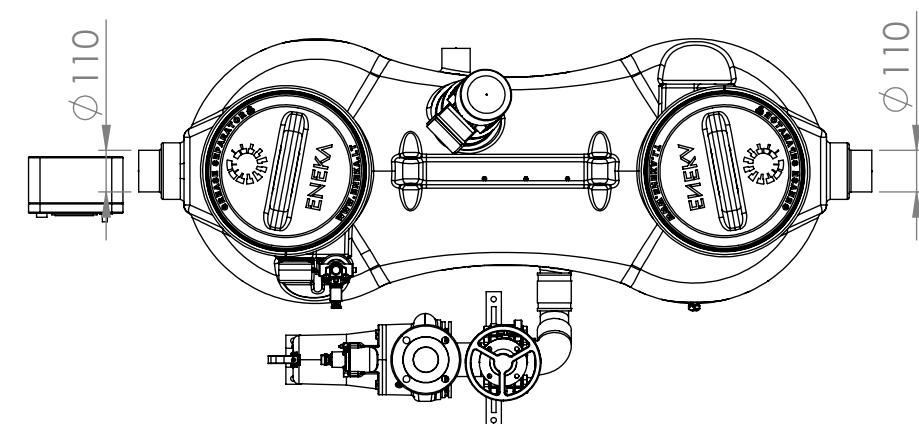
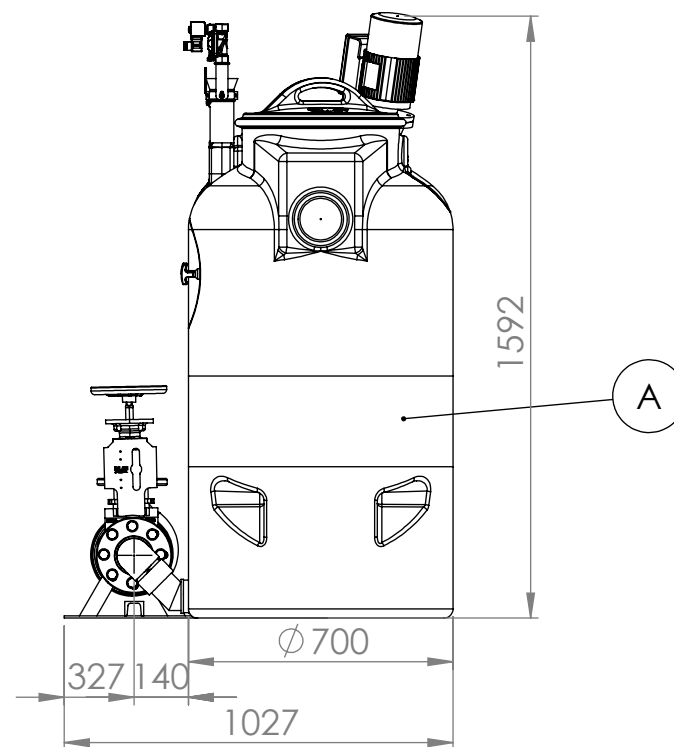


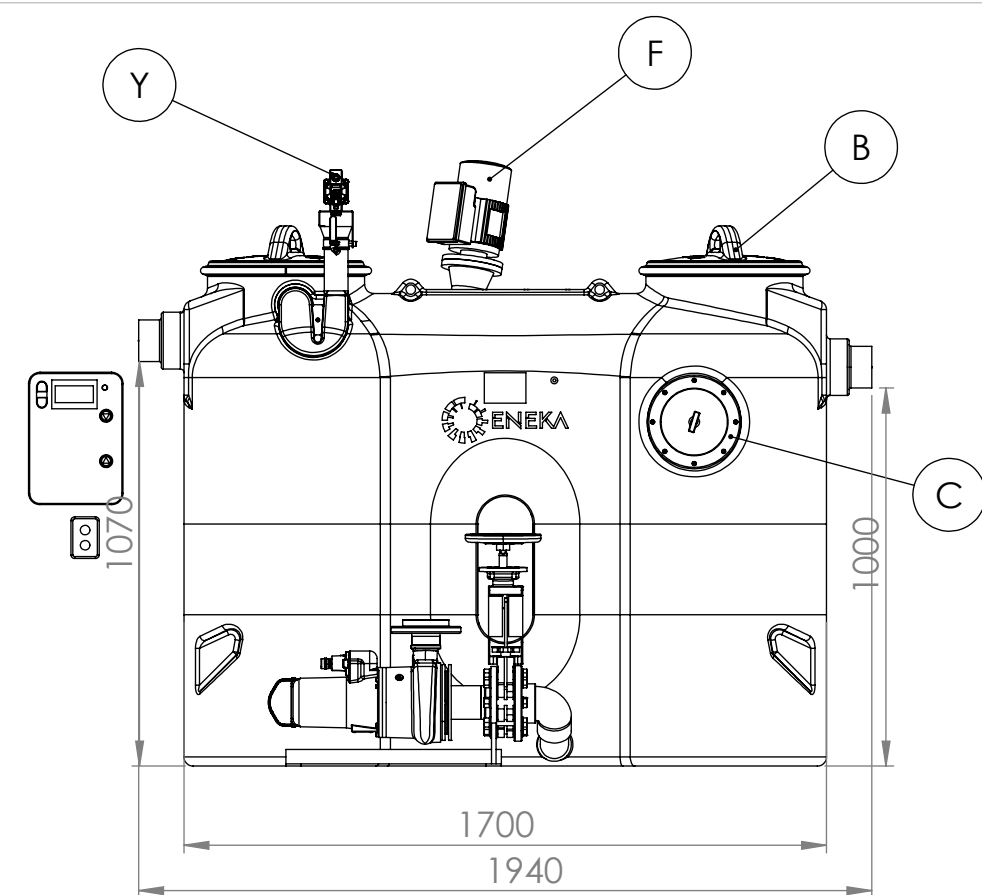

Position	Name	Quantity
A	Greasly 4A body	1
B	Lid with locking ring and gasket	2
C	Inspection window	1
Y	Automatic water filling unit	1
F	Mixer	1
J	Disposal pump unit	1
H	Control panel	1
K	Remote control (optional)	1
	Greasly 4A Pump technical characteristics	
	Flow rate	4 l/s
	Total volume	850 L
	Grease volume	160 L
	Separator volume	450 L
	Sludge trap volume	400 L
	Weight	203 kg

Product Greasly	Name Greasly 4A Pump	Scale 1:20
Design by V.Laucius	Checked by E.Mozuraitis	Approved by E.Kuodis
UAB ENEKA Vandziogalos g. 94 LT-47467 Kaunas, Lithuania tel. +37037377441, faks.+37037377907 www.eneka.lt, info@eneka.lt		Construction site -
ENEKA		Drawing type Customer drawing
Date 2024-05-14		Drawing no. -
Lang. en		Sheet 1