


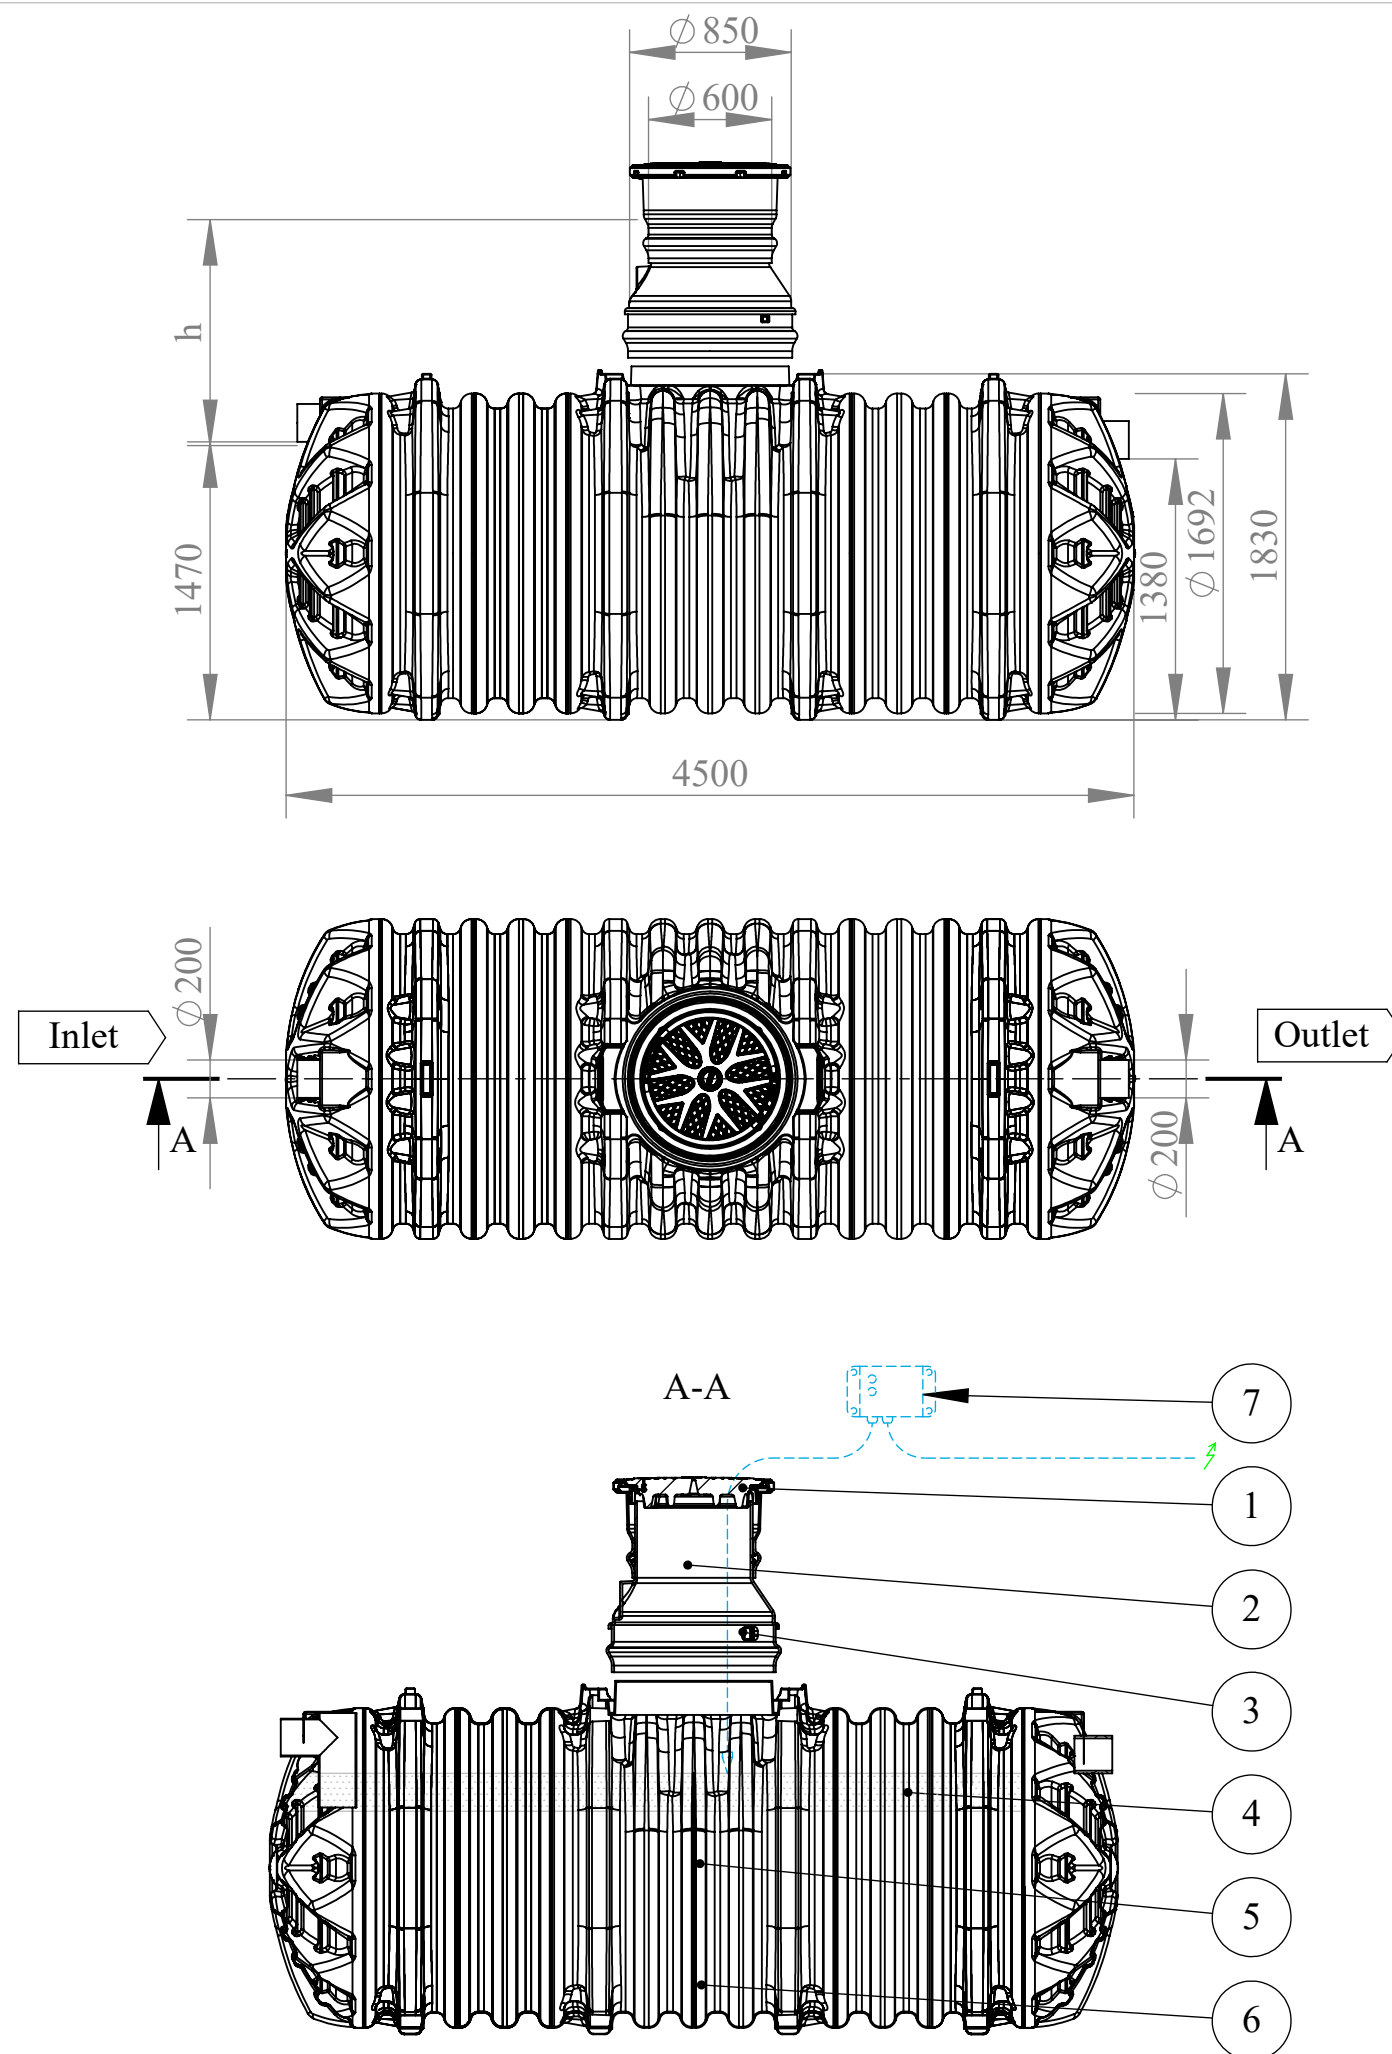

		Class	Weight
1	Cover according to standart EN124 (☒)	A35 (3,5 t) ☐	13 kg
		B125 (12,5 t) ☐	45 kg
		C250 (25 t) ☐	55 kg
		D400 (40 t) ☐	90 kg
2	Maintenance shaft (☒)	800...1000 ☐	31 kg
		1000...1250 ☐	33 kg
		1250...1500 ☐	42 kg
		1500...1750 ☐	52 kg
		1750...2000 ☐	62 kg
		2000...2250 ☐	71 kg
		2250...2500 ☐	80 kg
3	Ladder		
4	Storage capacity for grease	1000 l	
5	Grease separation chamber	4930 l	
6	Sludge trap	2140 l	
7	Grease level alarm sensor (☒)	☐	
Nominal flow rate		20 l/s	
Total capacity		7070 l	
Weight excluding manhole shaft/lid S/R		376/535 kg	

Product		Name		Scale	
GR		Grease separator Greasly 20 B		1:40	
Design by		Checked by	Approved by	Drawing type	
V.Laucius		E.Mozuraitis	E.Kuodis	Customer drawing	
 UAB ENEKA Vandziogalos g. 94 LT-47467 Kaunas, Lithuania tel. +37037377441, faks.+37037377907 www.eneka.lt, info@eneka.lt			Construction site		Drawing no.
			-		-
Date		Lang.	Sheet		
1/20/2022		en	1		