



Sanicondens Clim Deco

Compact solution and easy installation.



PRODUCT BENEFITS

- Compact solution for aesthetic installation
- Easy installation: fixing kit supplied
- Automatically reset thermal protector

CONNECTIONS

- ← Discharge diameter DN : 8-10 mm
- Inlet diameter DN : 22 mm




PACKAGING

Sanicondens Clim Deco, wall mounting, cover screws

CURVE

Discharge height (m)

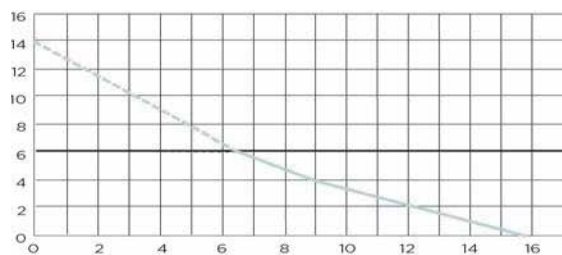


Flow rate (l/h)

TECHNICAL FEATURES

Max. power of the air conditioning unit	10 kW
Number of entries	1
Inlet diameter DN	22 mm
Discharge diameter DN	8-10 mm
Tank volume	0.175 L
Max. flow rate	15 L/h
Max. incoming temperature	35 °C
Voltage - Frequency	220-240 V - 50-60 Hz
Max. power consumption	22 W
Electrical class	II
IP Rating	IP24
Noise level	23 dB(A)
Identification and logistics	
Gross weight	0.9 kg
EAN code	3308815012216
Factory code	CLIMDECO2

DIMENSIONS

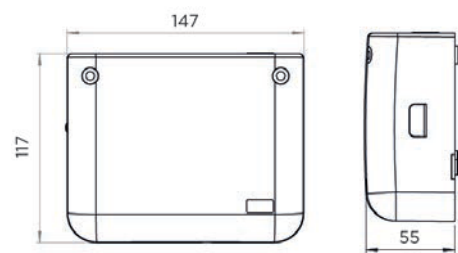

Dimensions (mm)