

Sanicondens Clim Pack S

Complete solution for neat installation.



6 m




PRODUCT BENEFITS

- Complete solution for aesthetic installation
- Easy installation: fixing and connection accessories included
- Reversible plate: right or left

CONNECTIONS

- (A) elbow adaptor
- (B) level sensor
- (C) pump unit
- (D) anti-siphoning vacuum
- (E) waste water pipe




TECHNICAL FEATURES

Max. power of the air conditioning unit	8 kW
Inlet diameter DN	16 mm
Discharge diameter DN	6 mm
Max. flow rate	9 L/h +/- 15 %
Max. incoming temperature	35 °C
Max. suction distance between the detection bloc and the pump	2 m
Voltage - Frequency	220-240 V - 50-60 Hz
Max. power consumption	22 W
IP Rating	IP24
Noise level	21 dB(A)
Identification and logistics	
EAN code	3308815083919
Factory code	CLIMPACK3SBL

PACKAGING

Sanicondens Clim pack pump, detection unit, trunking, 1.2 m flexible hose, mounting bracket, vent tube, power cable supplied

CURVE

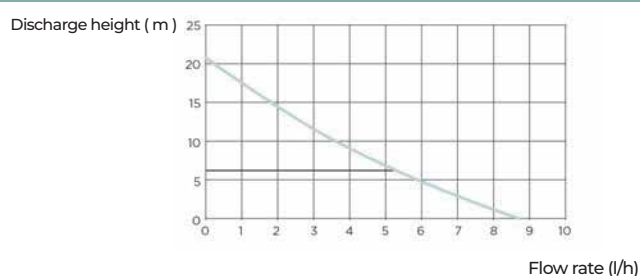

DIMENSIONS

