

Sanishower



A compact pump designed to be installed next to or underneath a shower tray with access for maintenance.



4 m
40 m



BY Cert. 6045364



PRODUCT BENEFITS

- Pump suitable for standard shower tray.
- Low noise level.
- Aesthetic design for discreet installation.
- Low starting level.

CONNECTIONS

- ← Discharge diameter ext. : 32 mm
- External inlet diameter : 32, 40 mm



TECHNICAL FEATURES


Number of entries	2
External inlet diameter	32, 40 mm
Discharge diameter ext.	32 mm
Min. shower tray height	12 cm
Max. incoming temperature	35 °C
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	250 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	4.6 kg
Factory code	D2STD

PACKAGING


Sanishower, non-return valve, connectors

CURVE

Discharge height (m)

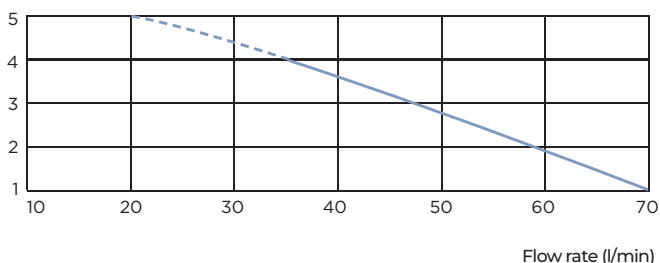

DIMENSIONS

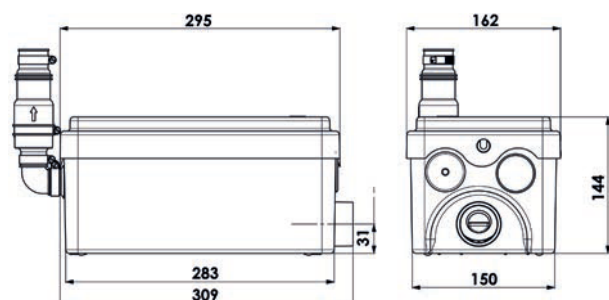

Dimensions (mm)