

Sanivite



Ideally suited for a kitchen or a pantry with four inlets.



5 m
50 m



BV Cert 605364



PRODUCT BENEFITS

- Ideally suited for a kitchen or pantry.
- Low level switch-on.
- Carbon filter included.
- 4 inlets available.

CONNECTIONS

Discharge diameter ext.:
32 mm

External inlet diameter:
40 mm




PACKAGING

Sanivite, non-return valve, connectors, activated carbon filter included to neutralise odours

CURVE

Discharge height (m)

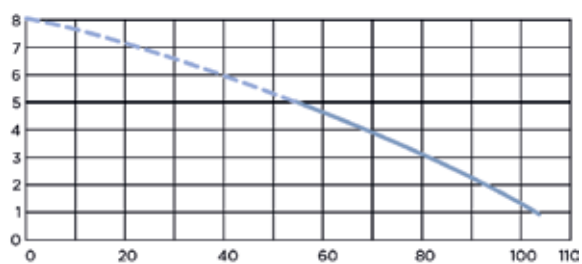

Flow rate (l/min)

TECHNICAL FEATURES



Number of entries	4
External inlet diameter	40 mm
Discharge diameter ext.	32 mm
Min. shower tray height	15 cm
Max. incoming temperature	60°C intermittently (max. 5 min)
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	6.2 kg
Factory code	SVSTD

OPTIONAL

Sanialarm
Factory code : ALARM
See pg. 19



DIMENSIONS



Dimensions (mm)