

Sanispeed



Ideal for light commercial environments such as small shops, cafes, offices, bars and dental surgeries.



7 m
70 m



PRODUCT BENEFITS

- Ideal for installing a professional kitchen.
- Water softener compatible.
- Flow rate: 110 L/min.
- Can accept 75°C water.
- 4 inlets.

CONNECTIONS

- ← Discharge diameter ext. : 32 mm
- External inlet diameter : 40 mm




PACKAGING

Sanispeed, non-return valve, connectors. activated carbon filter to neutralise odours

CURVE

Discharge height (m)

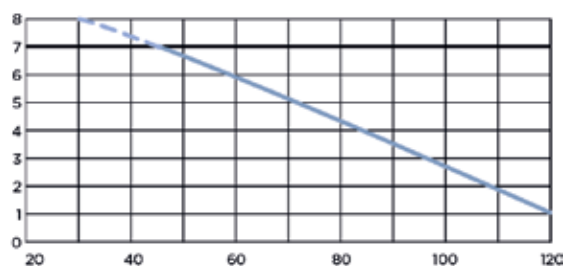

Flow rate (l/min)

TECHNICAL FEATURES


Number of entries	4
External inlet diameter	40 mm
Discharge diameter ext.	32 mm
Min. shower tray height	15 cm
Max. incoming temperature	75°C intermittently (max. 5 min)
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	7 kg
Factory code	SSPSTD

OPTIONAL

Sanialarm
Factory code : ALARM
See pg. 19



DIMENSIONS

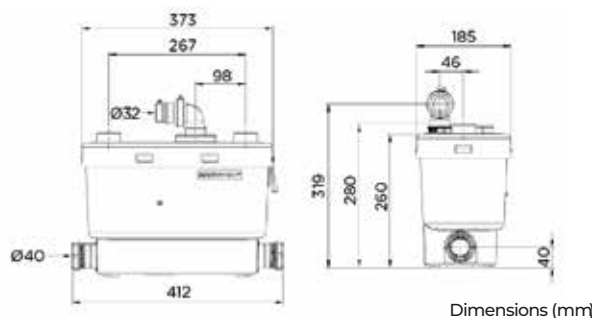

Dimensions (mm)