

Saniflo



The original macerator pump unit that allows installation of an extra WC when a conventional solution isn't possible.



4 m
100 m



BY Cert. 6045366



PRODUCT BENEFITS

- Perfect for draining wastewater from a toilet.
- Suitable for use in a basement or loft conversion.
- Quiet product.

CONNECTIONS

← Discharge diameter ext. :
22/28/32 mm

→ External inlet diameter :
100 mm



Single blade cutter




PACKAGING

Saniflo, non-return valve, connectors, activated carbon filter to neutralise odours

CURVE

Discharge height (m)

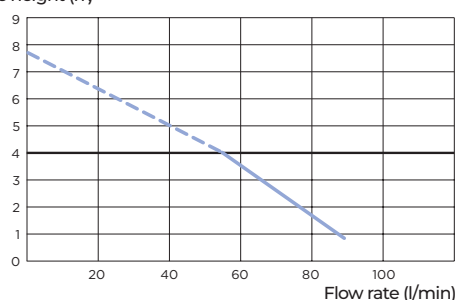

TECHNICAL FEATURES

Number of entries	1
External inlet diameter	100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35 °C
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	5.6 kg
Factory code	SXSTD

OPTIONAL

Sanialarm
Factory code : ALARM
See pg. 19



DIMENSIONS

