

Sanitop



Similar to the original Saniflo but allows the connection of a WC and a wash basin.



5 m
100 m



BV Cert. 6045364



PRODUCT BENEFITS

- Lets you install 1 toilet + 1 washbasin.
- Quiet product.

CONNECTIONS

Discharge diameter ext. :
22/28/32 mm

External inlet diameter :
40, 100 mm



Single blade cutter




PACKAGING

Sanitop, non-return valve, connectors and activated carbon filter included to neutralise odours.

CURVE

Discharge height (m)

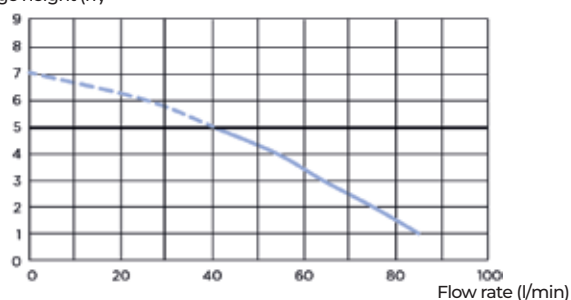

TECHNICAL FEATURES

Number of entries	2
External inlet diameter	40, 100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35 °C
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	5.7 kg
Factory code	ST2STD

OPTIONAL

Sanialarm
Factory code : ALARM
See pg. 19



DIMENSIONS

