

Sanipro XR



The neat unit makes it easy to install an extra bathroom. Can easily deal with a WC, basin, bidet and a power shower.



5 m
100 m



BV Cert 6045364



PRODUCT BENEFITS

- Reliable and efficient macerating system.
- Drains all the water from a bathroom room.
- Quiet product.


CONNECTIONS

← Discharge diameter ext. :
22/28/32 mm

→ External inlet diameter :
40, 100 mm



Single blade cutter




PACKAGING

Sanipro XR, non-return valve, connectors and activated carbon filter included to neutralise odours.

CURVE

Discharge height (m)

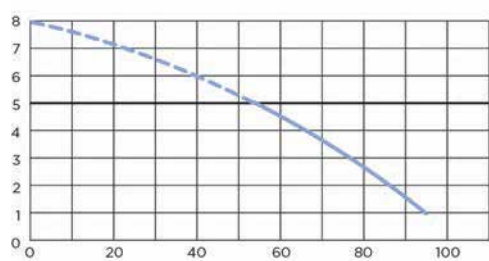

Flow rate (l/min)

TECHNICAL FEATURES

Number of entries	4
External inlet diameter	40, 100 mm
Discharge diameter ext.	22/28/32 mm
Min. shower tray height	13 cm
Max. incoming temperature	35 °C
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	7 kg
Factory code	SRSTD


OPTIONAL

Sanialarm

Factory code : ALARM
See pg. 19



DIMENSIONS

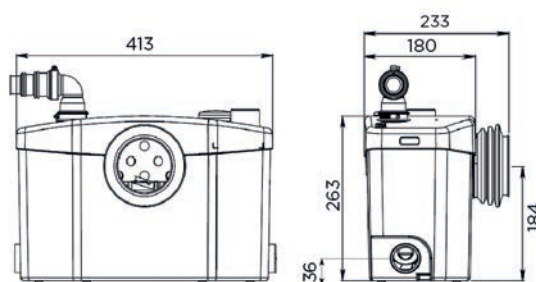

Dimensions (mm)